
VSI

PIPELINE INSULATOR

ANSI 300



IMAC Systems, Inc.
90 Main Street, PO Box 1605
Tullytown, PA 19007

1-800-955-4GAS
Phone: (215) 946-2200
Fax: (215) 943-2984

sales@imacsystems.com


VSI

PIPELINE INSULATOR

ANSI 300

- State-of-the-Art Engineered for Applications in Natural Gas Systems
- Ends of Schedule 80 Steel Pipe per ASTM A53 Grade "B"
- High-Speed Spin Molded Urethane-to-Pipe Seal. Also, Mechanically Compressed by Fiberglass Winding.
- Unitized Body of Reinforced Filament Helix-Wound Fiberglass per Mil-R-60346C Laminated with Epoxy per Mil-R-9300B Electrical Grade
- American Made with Off-the-Shelf Deliveries
- Very economically priced
- High Dielectric Strength - 20,000 Volts DC - Air Gap Controlled
- Rugged High Strength Design - Resistant to Bending and Pullout
- Maintenance Free Performance - Permanently Factory Sealed
- Bubble Tight - 150% Shell Tested with Nitrogen

VSI PIPELINE INSULATOR ANSI 300

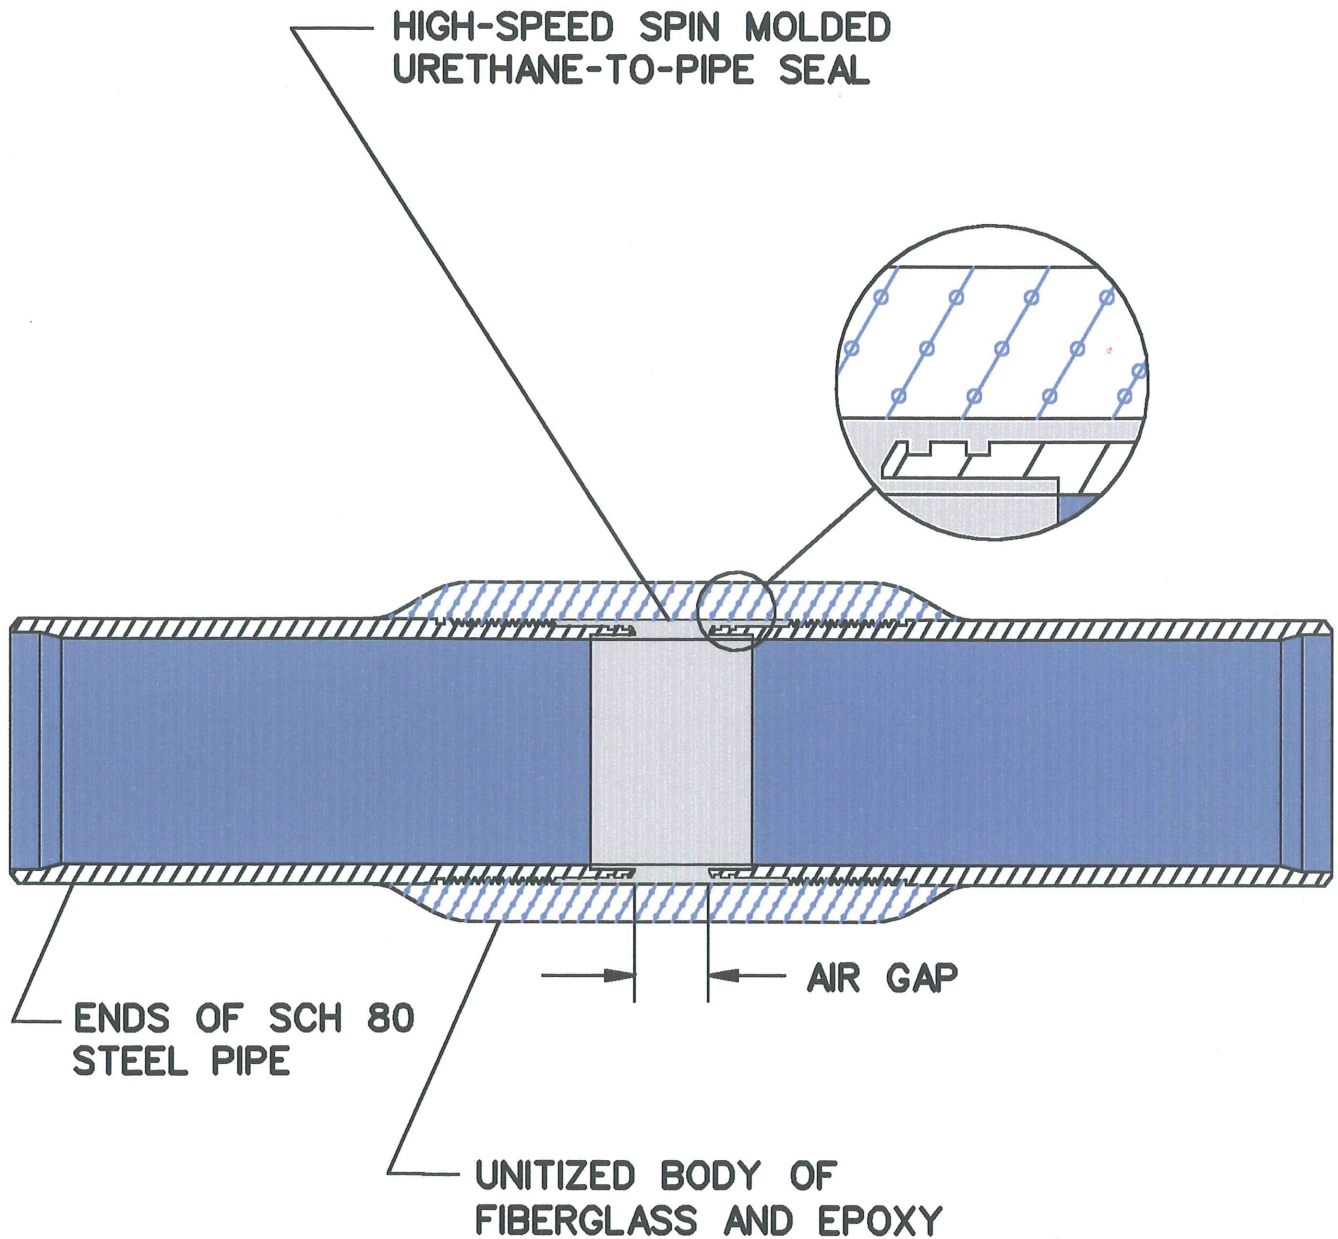

VSI PIPELINE INSULATOR ANSI 300

SIZE	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	WT(LBS)
2"	2.067	1.939	2	3 ¹ / ₄	2 ³ / ₈	7 ³ / ₄	21 ⁵ / ₈	1	11
3"	3.068	2.900	3	4 ¹ / ₂	3 ¹ / ₂	8 ¹ / ₂	21 ⁵ / ₈	1 ¹ / ₈	21
4"	4.026	3.826	4	5 ³ / ₄	4 ¹ / ₂	9 ³ / ₄	22 ¹ / ₂	1 ¹ / ₄	35
6"	6.065	5.761	6	8 ³ / ₈	6 ⁵ / ₈	11 ³ / ₈	22 ³ / ₄	1 ³ / ₈	68
8"	7.981	7.625	8	10 ⁷ / ₁₆	8 ⁵ / ₈	13 ¹ / ₂	25	1 ¹ / ₂	116
10"	10.020	9.564	10	13 ¹ / ₂	10 ³ / ₄	16 ¹ / ₂	27 ¹ / ₂	1 ⁵ / ₈	187
12"	11.938	11.376	12	15 ¹ / ₂	12 ³ / ₄	18 ¹ / ₂	30 ¹ / ₂	1 ³ / ₄	285

